



# ACCESSORY BUILDINGS ON CONCRETE FOUNDATION, UP TO 592 SQ FT OR 30' WIDE

Circle one:

FOUNDATION SLAB UP TO 500 SQUARE FEET  
Anchor Bolts @ 48" or PTW 2x4 nailer

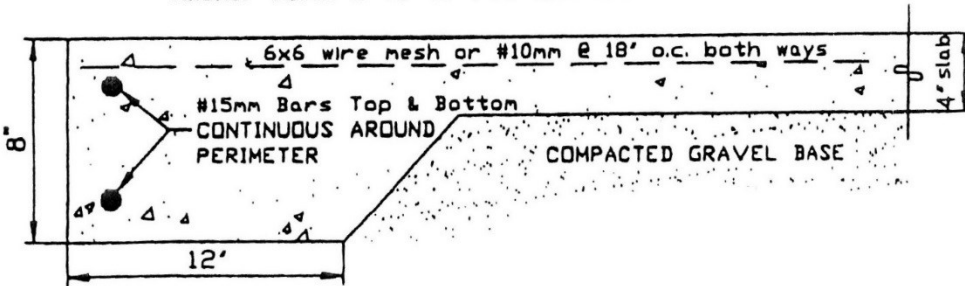


Foundation Slab up to 592 Square Feet  
or 30' Wide

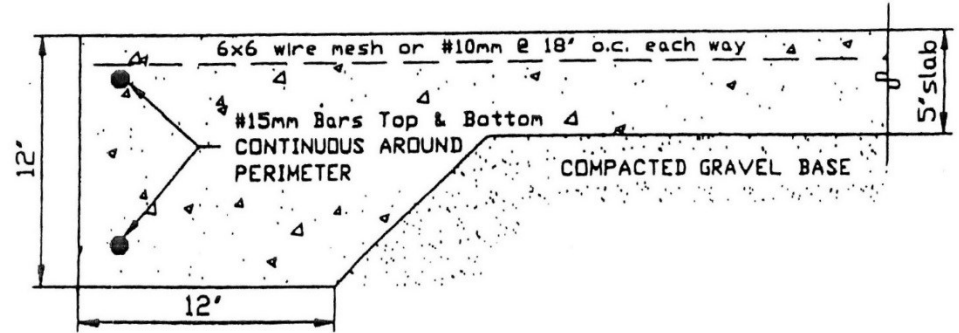


## ROOF STYLE AND OVERHEAD DOOR LINTEL LOCATION


Circle one:

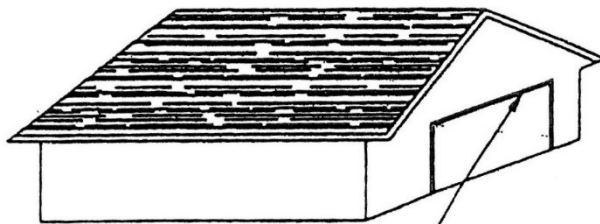

Lintel over door opening  
in gable end

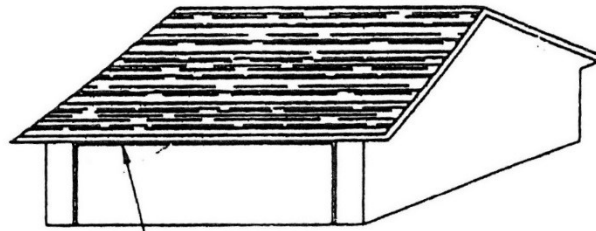

Lintel over door opening  
Supporting roof loads

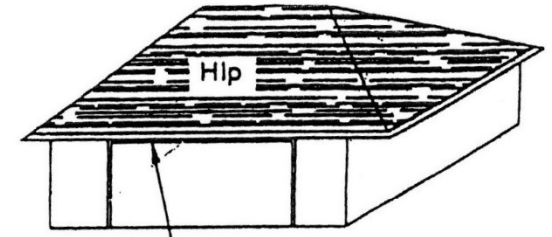

Lintel over door opening  
Supporting roof loads

## SPECIFICATIONS

### LINTEL:

Type & Size of Lintel for Windows & Man Doors: \_\_\_\_\_

Overhead Door Size & Lintel: \_\_\_\_\_

### ROOF:

Type & Thickness of Roof Sheathing: \_\_\_\_\_

Type & Spacing of Roof Trusses: \_\_\_\_\_

Slope of Roof: \_\_\_\_\_

Width of Overhang: \_\_\_\_\_

### WALL:

Type of Siding: \_\_\_\_\_

Type & Thickness of Wall Sheathing: \_\_\_\_\_

Size & Spacing of Studs: \_\_\_\_\_

Height of Wall: \_\_\_\_\_

Type, Size & Spacing of Anchor Bolts: \_\_\_\_\_

\_\_\_\_\_

**FOR FINAL:** Eavestroughs, Downspouts & Leaders shall be in place